

Miro Cube[®] 2 WNC


DESIGNED BY THE BLACK TANK




PHOTOMETRICS

WNC (2700-6000K Tunable White)


All On - No Lens Optic

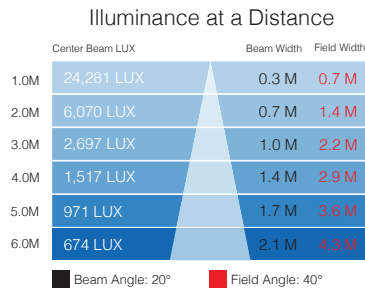


Full Cool White - No Lens Optic

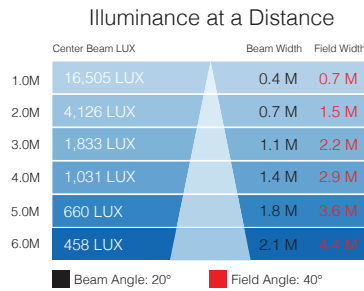

Full Warm White - No Lens Optic

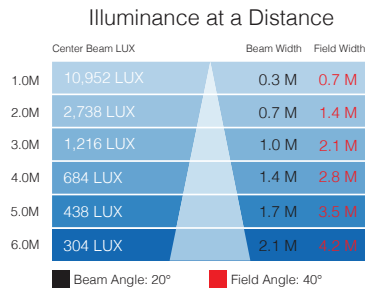

Full Neutral White - No Lens Optic

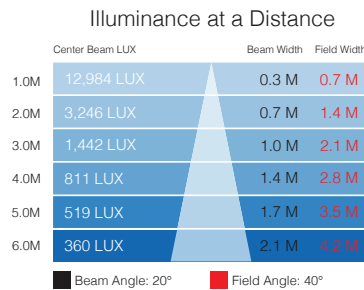


PHOTOMETRICS

4C (RGBW)

4CA (RGBA)


All LEDs On Native

Illuminance at a Distance

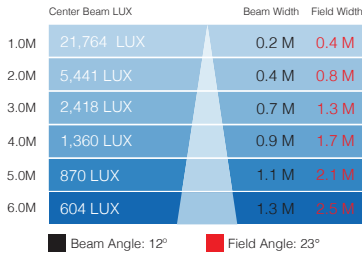


All LEDs On Native

Illuminance at a Distance

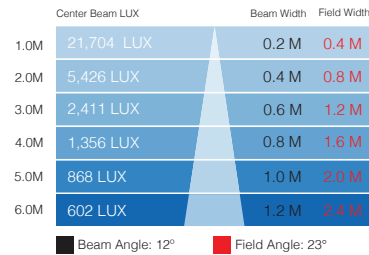


All LEDs On 20°

Illuminance at a Distance

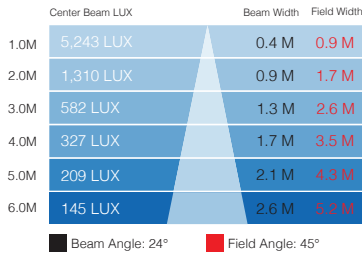


All LEDs On 20°

Illuminance at a Distance

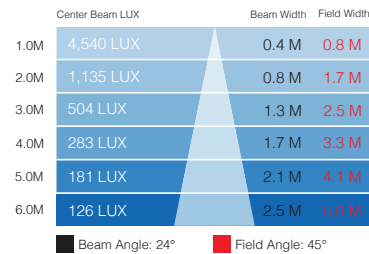


All LEDs On 40°

Illuminance at a Distance

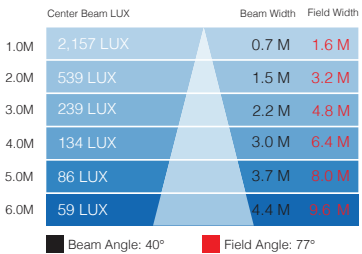


All LEDs On 40°

Illuminance at a Distance

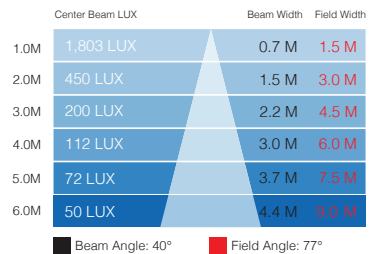


All LEDs On 60°

Illuminance at a Distance

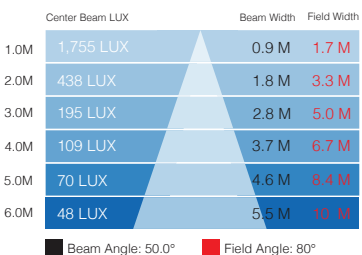

All LEDs On 60°

Illuminance at a Distance

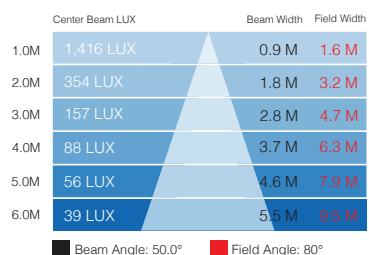

Miro Cube[®] 2 UV365

DESIGNED BY THE BLACK TANK



PHOTOMETRICS

UV365 (365nm Black Light)

With Narrow Beam Lens

Illuminance at a Distance

	Absolute Irradiance	Beam Width
1.0M	4.1mW/cm ²	0.23 M
2.0M	0.98mW/cm ²	0.45 M
3.0M	0.51mW/cm ²	0.68 M

■ Beam Angle: 13° ■ Field Angle: 26°

With Wide Beam Lens

Illuminance at a Distance

	Absolute Irradiance	Beam Width
1.0M	0.99mW/cm ²	0.55 M
2.0M	0.24mW/cm ²	1.11 M
3.0M	0.12mW/cm ²	1.66 M

■ Beam Angle: 31° ■ Field Angle: 57°